



Product Technical Data Sheet

**Model SP1000**

Description

The SP1000 is a dual 18" portable subwoofer. It includes built in castors and skid plates for self contained portability. In addition, the skid plates provide stacking support by mating top to bottom when the SP1000 is stacked into ground clusters.

The SP1000 uses an integrated pole socket mount so any speaker with a pole mount type adaptor can be used with the subwoofer.

The 18" drivers for the SP1000 use a Neo magnet structure and high-temperature voice coil with modern manufacturing techniques resulting in a very durable and efficient design.



Key Features:

- Ported front loaded driver design
- 13-ply Baltic Birch cabinet
- Extensive internal bracing
- Integrated sub to sub stacking support
- Built in castors and skid plates
- Built in pole socket mount

Product Specifications	
Operating Range <sup>1</sup>	33Hz - 200Hz
Sensitivity (1W/1M) <sup>2</sup>	102dB
Power Handling <sup>3</sup>	1000W (64 Volts) AES/2
Recommended Amp Power for Max Output	2000 Watts @ 4 ohms
Max SPL (calculated) 1 Meter	132dB Cont. / 138dB Peak
Nominal Impedance	4 Ohms
Transducers	2 x 18" Woofers
Input	NL4 x2 Pair 1 = Woofers 1 & 2
Dimensions	20.97" (53.3cm) H 38" (96.5cm) W 37.5" (95.3cm) D
Enclosure	13ply Baltic Birch
Weight	180lbs (81.7kg) Shipping 260lbs (117.9kg)
Rigging	None Provided
Finish Options	Black Latex

**Applications**

Developed for portable applications where integrated rigging and low frequency support is desired

- Portable PA
- Integrated pole socket
- Traditional ground stacked subwoofer clusters


1. LF at -10dB

2. Full bandwidth pink noise is applied and amplified to a level and measured at the loudspeaker terminals - corresponding to 1 Watt as referenced to the loudspeakers nominal impedance. SPL is measured in a half-space environment in the loudspeakers far field. Data is extrapolated to 1 Meters distance from the loudspeaker.



3. AES established with ambient temperature at 22C in accordance with AES/2-1984 standard. IEC stated in RMS voltage according to IEC 268-5




# SP1000 Drawings

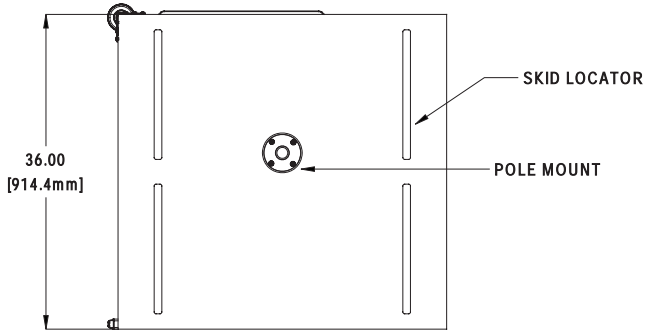


**TOP**

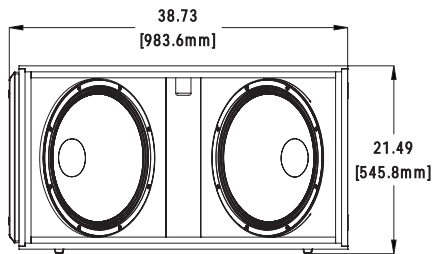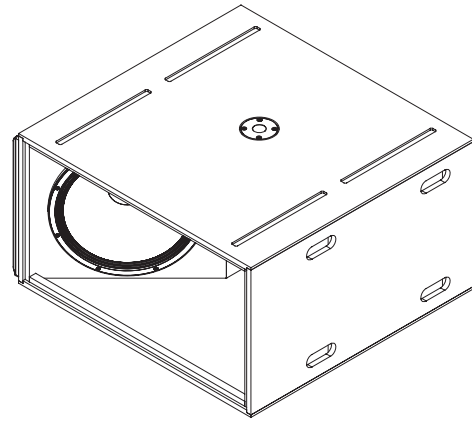


**FRONT**

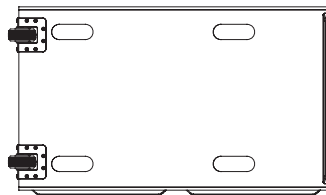

**SIDE**

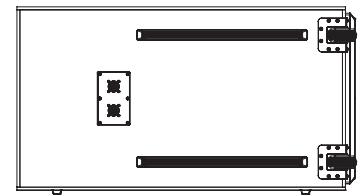

**BACK**

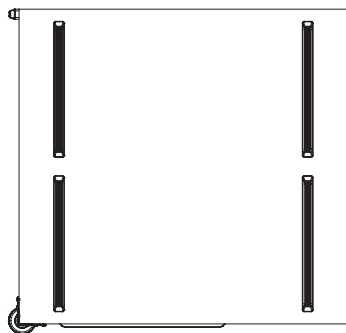

**BOTTOM**